




MARX
Bestmarken in Sachen Service & Technik.

YANMAR

6LY-UTE

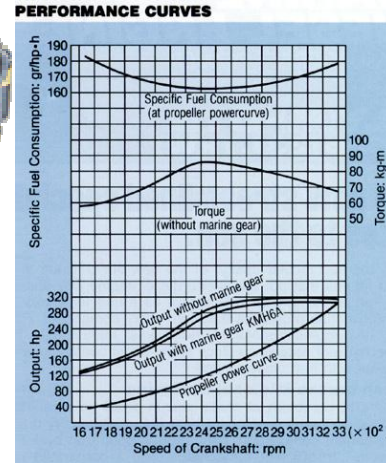

Model	6LY-UTE
Configuration	4 Stroke, Vertical, Water Cooled Diesel Engine
Number of Cylinders	6 In-line
Bore x Stroke	3.94" x 4.33" (100mm x 110mm)
Displacement	316" (5.184 L)
Continuous Rating Output at Flywheel	260 HP/3100 rpm (191.2 kW/3100 rpm)
Maximum Output at Flywheel	315 HP/3300 rpm (231.7kW/3300 rpm)
Combustion System	Direct Injection
Aspiration	Turbocharged with Intercooler
Starting System	Electric Starting (DC 12V, 2.5kW Starting Motor/12V 80A AC Generator)
Cooling System	Fresh Water Cooling by Centrifugal Fresh-Water Pump and Rubber Impeller Seawater Pump
Lubrication System	Forced Lubrication with Gear Pump
Rotation	Counter Clockwise (Viewed from Stern)
Dry Weight	1307 lbs. (593 kg)

3-5-2. 6LYM-UTE/STE

Unit: mm (in.)

